


Evaluation electronic type FE140

For the Flow Controller FC3

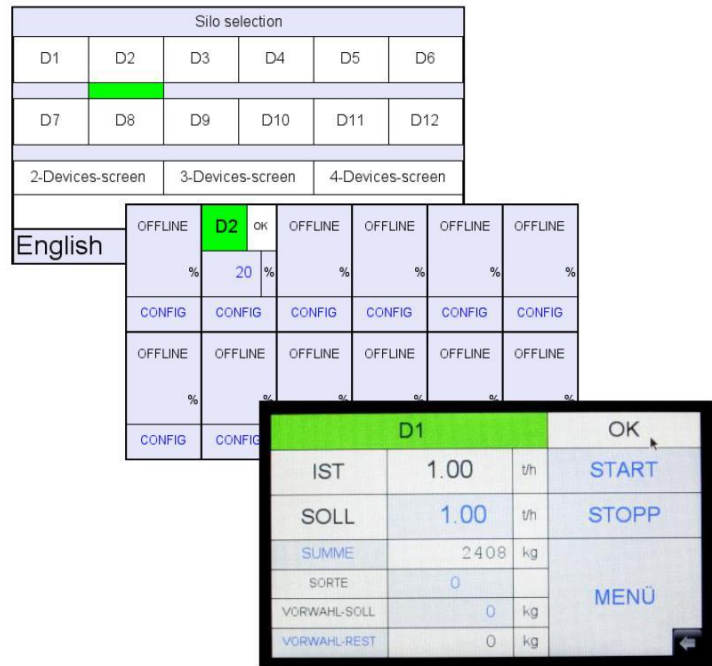

The evaluation electronic processes the measuring data supplied by the Flow Controller FC3 and displays product capacity and total weight. User can enter target capacity and program a desired batch amount by preselection function. User is informed about alarms and product types can be set. The electronic is suited for max. 12 dosing units.

Technical data *

Installation	Panel mounting	Wall mounting inside steel case
Supply voltage	+ 24 V DC	88...264V AC (47...63Hz)
Type of protection	IP65 (front)	IP65
Dimensions	H:93 x W:119 x D:32 mm	H:300 x W:200 x D:100 mm
Interfaces	RS485 Modbus (for communication with dosage units) Ethernet (for data transfer to PC via VNC client) USB (possible program updates with USB stick)	
User interface	4,3" TFT Touch-screen	
Display	LCD-Display (128x64px)	
Functions	<ul style="list-style-type: none"> • Access to max. 12 dosing units • Display and input of capacity in t/h • Summation of total amount in kg • Preselection function for desired batch amounts in kg • Display of alarm codes • Product type setting 	

*Technical specifications are subject to changes.